

## WARRANTY

SureFire warrants our suppressors and suppressor related products to be free from defects in workmanship and materials for the lifetime of the original owner. We will repair, replace, or refund your original purchase price of a product if it is determined by SureFire to be defective. This warranty does not cover normal wear and tear, damage to the suppressor resulting in whole or in part from unauthorized repairs, unstable or non-SAAMI/NATO specification ammunition, abuse, misuse, or neglect. Unwarranted repairs to the suppressor, including but not limited to core rebuilds, made necessary by any of these factors will be invoiced to the owner who will be given the right to approve such work before it commences. BSD's and BFA's are designed to be used with blank ammunition only. Any damage due to live fired rounds is not covered by this warranty and cannot be repaired. SureFire assumes no responsibility whatsoever and will honor no claims for damages, regardless of nature, for physical injury or property damage resulting from careless and/or irresponsible handling, adjustments to the suppressor and/or suppressor related products, neglect or abuse.

## DISCLAIMER

The above warranties are exclusive, and to the extent permitted by applicable laws, shall be in lieu of all other warranties, expressed or implied, including, without limitation, any warranty of merchantability or fitness for a particular use or purpose. SureFire disclaims any and all liability for product malfunctions, physical injuries, or property damage that result in whole, or in part, from the criminal, negligent, or improper use of the product: and/ or from modifications or alterations thereto. In no event shall SureFire be liable for any incidental, special, or consequential damages relating to the purchase, use, or performance of any SureFire product.


## WARRANTY CLAIMS

For repair or replacement email Technical Support at [technicalsupport@surefire.com](mailto:technicalsupport@surefire.com) or contact Customer Service at 800-828-8809 (toll free) or 714-545-9444 and obtain a Return Merchandise Authorization number (RMA#). An initial request for RMA can also be submitted through the link on [www.surefire.com](http://www.surefire.com). You may be supplied with additional shipping instructions specific to the product being returned. Package the unit carefully and in accordance with all instructions then return to the mailing address provided (no CODs please). SureFire will pay any reasonable shipping costs to return the unit to you. ©2019 SureFire, LLC. All rights reserved.

Revision A 12-2020  
71-01-1126  
SF-TRILUG9 Series

18300 MT. BALDY CIRCLE  
FOUNTAIN VALLEY, CA 92708-6122  
[WWW.SUREFIRE.COM](http://WWW.SUREFIRE.COM)

**SUREFIRE**



**SF-TRILUG9**

MUZZLE DEVICE / ADAPTER

**USER MANUAL**

## SF-TRILUG9



### INTRODUCTION

The SF-TRILUG9 Series is designed to fit 9 mm platforms with 1/2-28, 1/2-36 or M13.5 x 1 LH muzzle threads to accommodate SureFire's SF RYDER 9-MP5 suppressor. The adapter is machined from US mill-certified alloy steel with precision-cut threads and durable black nitride coating.

### KIT CONTENTS

- SF-TRILUG9 adapter
- Rocksett
- User Manual

### WARNING

ALWAYS confirm weapon is unloaded and on SAFE before attempting installation.

### INSTALLATION

1. Secure the barrel and upper receiver of the host weapon in a vise or comparable holding fixture. Use of an upper receiver vise block and insert is recommended for greater stability during installation and to protect the receiver and barrel from damage when tightened in the vise.
2. Referring to the host weapon user manual, remove the existing flash hider/muzzle brake, spacers, shims and/or washers from the host weapon (Figure 1). DO NOT reuse shims, spacers or washers removed from the host weapon.

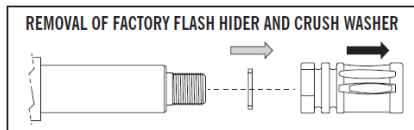


FIGURE 1

3. Apply acetone/degreaser to the muzzle threads of the host weapon barrel (Figure 2). Use cleaning cloth and/or brass brush to remove debris and residue from threads. Additionally, apply acetone/degreaser on a cotton swab to clean the internal threads of the adapter. Rocksett will not adhere to threads if the surface is not dry and stripped clean of debris and residue.

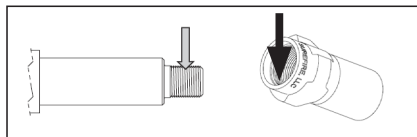


FIGURE 2

4. Apply a thin coat of Rocksett to the adapter threads and barrel threads. To review the material safety data sheet for Rocksett, go to [www.flexbar.com/PDF/MSDS-Certs/ROCKETT%20MSDS.pdf](http://www.flexbar.com/PDF/MSDS-Certs/ROCKETT%20MSDS.pdf)
5. Thread the adapter onto the muzzle and tighten using a crescent wrench.
6. Allow Rocksett to cure for 24 hours before firing host weapon.